

Models: LH1701 / LH2300


Frankie LED Wall Light

Installation Instructions

superlux
we engineer light

IMPORTANT:

- Wall mount only
- Before commencing installation Isolate all cables at the point of installation from the building Supply Mains
- Installation by a Registered Electrician is recommended
- Choose the mounting position carefully taking into account the fixing method, the services behind the wall and the IP rating required for that position.

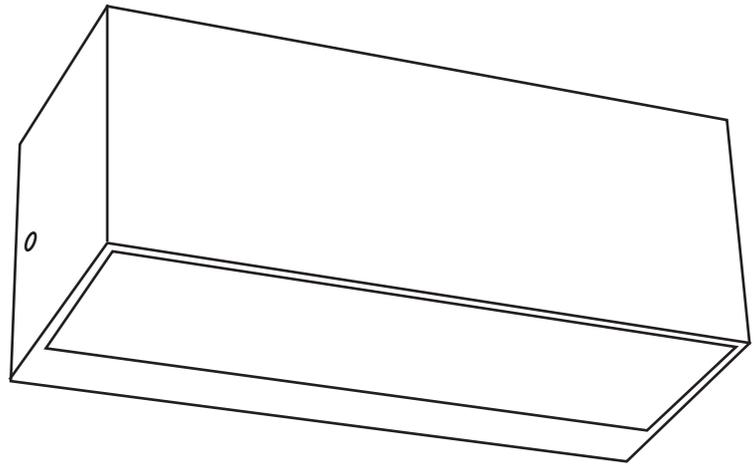

1. Take off the outer cover by removing the 2 screws.
2. Disassemble the lighting fixture by removing the diffuser screws.
3. With the supply cable through the grommet in the base, fix the base to the mounting surface using 2 screws.
NOTE: To maintain the IP rating ensure that the cable entry is sealed. Use silicone if necessary.
4. Connect the Supply Cable to the terminal block on the base plate.
Connect the Neutral wire to the N Terminal.
Connect the Phase wire to the L Terminal.
NOTE: Double Insulated - Do Not Earth.
5. Reassemble the diffuser assembly onto the base.
6. Finally reassemble the outer cover over the base unit.

DO NOT: damage the LED unit or disassemble the electronic driver. This LED luminaire does not have a replaceable lamp or serviceable parts. **DO NOT OPEN** - Consult a registered electrician.

!!! Please leave this page with the installation!!!
