




Lighting Distribution Pattern:

Horizontal axis shows 360° beam angle.

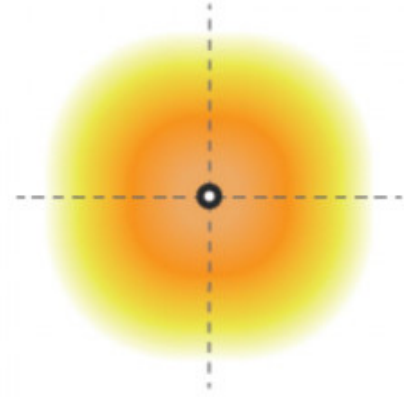

DIMENSIONS	TECHNICAL DATA	FEATURES	SPECIFICATIONS
<ul style="list-style-type: none"> • 900mmH • 275mmØ 	<p>Total lumens: 270</p> <p>Colour temp: 2,800K</p> <p>Power supply: Solar</p> <p>CRI: 80</p> <p>Wattage: 1.5W</p> <p>Beam angle: 130°</p>	<ul style="list-style-type: none"> • Part of our Freelite™ solar lighting range • Night Sky Friendly ULOR =1.04% • Offers you control over ighting preferences boasting 6 different lighting mode options • Built in microwave sensor, range: 8 Metres, 360° • Smart Energy Management system provides lighting over 2-3 days of cloud • Made with quality Aluminium and UV stabilised polycarbonate • IK10 vandal resistant material and theft proof design with concealed fixings ideal for civic public areas • Solar lighting offers a much cheaper, hassle-free installation compared with traditional lighting. With no trenching, cables, or conduits required, these costs are eliminated • 5 year warranty with expected battery life of 8 to 14 years when well situated - view warranty info here. • Battery replaceable • Find out more about our Freelite™ Solar range here in our Solar Lighting Hub • Read more about Night Sky Friendly lighting here in our blog article 	<p>Material: Die-Cast Aluminium, UV Stabilised Polycarbonate</p> <p>Lamp included: Yes</p> <p>IP Rating: IP65</p> <p>Technology field: LED</p> <p>Indoor / Outdoor: Outdoor</p> <p>Mounting type: Post Lights</p>

